


A




Aeropleat® III

Standard-Capacity Pleated Panel Filter

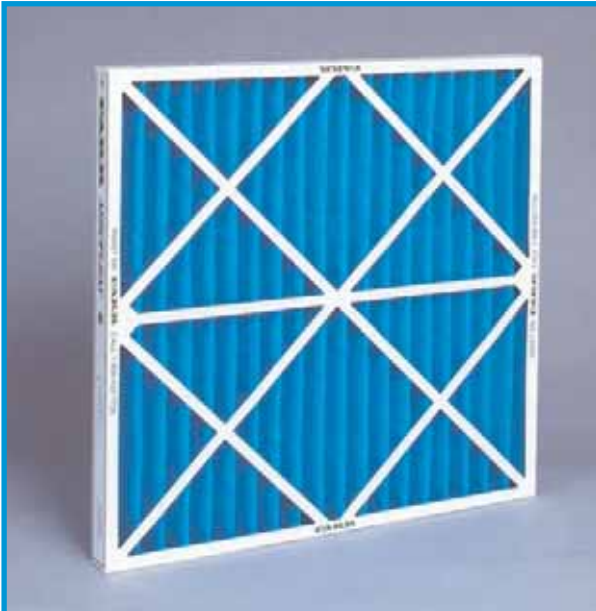

An economical choice for those requiring MERV 6 efficiency in HVAC applications

Composite Minimum Particle Efficiency

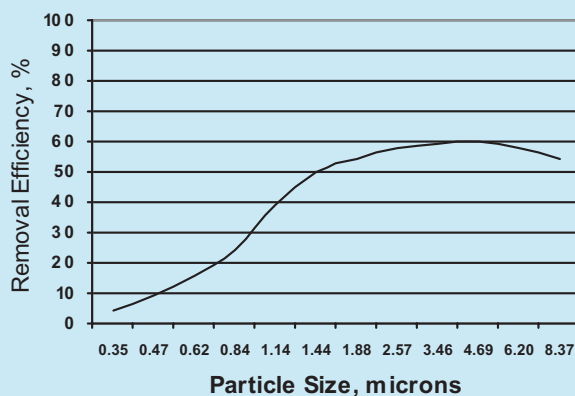

Values are MERVs when evaluated per ASHRAE Standard 52.2.

Meeting Today's Standards

The Camfil Farr Aeropleat® III pleated filter offers medium grade ASHRAE efficiency and sets the performance standard for those upgrading from lower efficiency throw-aways or pads. Using a mechanical particle capture principle, the Aeropleat III is a MERV 6 filter when evaluated per ASHRAE Standard 52.2-1999.

For Today's Applications

As a stand-alone filter, the Aeropleat III will remove many of the contaminants associated with today's indoor air quality concerns. Available in 1", 2" and 4" depths, its increased media area offers an extended service life when compared to lower efficiency throw-aways or pads. Applications include commercial buildings, educational facilities and specialty manufacturing. As a pre-filter, the Aeropleat III offers protection for the higher efficiency final filters required for today's high-technology applications.

Built for Today's HVAC Systems

- 10 pleats per linear foot (2" deep model) in a radial pleat design for full use of media area
- Optimum blend of cotton and synthetic fibers provides medium grade ASHRAE performance and increased dust-holding capacity
- Welded wire media grid is treated for corrosion resistance and prevents media oscillation or pull-away
- High wet-strength beverage board frame creates a rigid and durable filter pack. The pack will withstand 2.0" w.g. without failure.
- Available in 1", 2" and 4" depths



Australian Air Filters

Phone: (61-2) 9997 4366 Fax: (61-2) 9997 2654 Internet: www.AustAir.com.au

Australian Air Filters has a policy of continuous product research and development and reserves the right to change design and specifications without notice.

© Copyright Australian Air Filters 2006